

STANLEY®

AIR COMPRESSORS AND PNEUMATIC TOOLS





THE RANGE OF **STANLEY** **COMPRESSORS**

is suitable for the hobbyist, small-time craftspeople and professionals. Production also includes a wide range of accessories and pneumatic tools which satisfy all the main uses of compressed air.

INDEX

4



AIR COMPRESSOR COMPONENTS

15



DIRECT DRIVEN LUBRICATED RANGE

6



PACKAGING

16



BELT DRIVEN SINGLE-STAGE COMPRESSORS

7



SILTEK RANGE

18



PNEUMATIC TOOLS

11



OILLESS RANGE

35



ACCESSORIES KITS

AIR COMPRESSOR COMPONENTS

THE MAIN PARTS OF AN AIR COMPRESSOR



A AIR COMPRESSOR PUMP

This is the main part of an air compressor. Inside the compressor pump, one or two pistons compress the air taken from the environment and deliver it to the receiver.

B AIR DELIVERY PIPE

Connects the compressor pump to the receiver, thus, the compressed air is delivered from the compressor pump to the receiver.

C AIR RECEIVER

The vessel which stores the accumulated compressed air ready for use. It is made of extra thick steel and it is always tested to a pressure higher than the working pressure of the compressor. Its function is to compensate the difference between the amount of air produced by the compressor pump and the one required by the user. The use of a larger receiver reduces the number of start-ups required by the compressor.

D SHROUD/BELT-GUARD

Protects against accidental contact with the moving parts and directs the cooling air produced by the flywheel or directly by the motor fan towards the areas where the heat is generated.

E ELECTRIC MOTOR

Transmits movement to the air compressor pump either directly (direct driven compressors) or through a belt (belt-driven compressors).

F GAUGES

One gauge indicates the pressure of the air inside the air receiver and the other one indicates the outlet pressure.

G PRESSURE SWITCH

Controls the compressor by switching the machine off when the pressure inside the receiver reaches the default value (for example 8 or 10 bar) and restarts the compressor when the compressed air is used and the pressure drops to a pre-set value.

H PRESSURE REDUCER

Makes it possible to reduce the pressure of the air discharged from the receiver and to adjust it according to the application.

I SAFETY VALVE

Prevents the pressure inside the receiver from exceeding the safety values in case of the pressure switch failure.

J DRAIN VALVE

Makes it possible to drain all the water that forms in the receiver due to the condensation of the water vapor contained in the compressed air.

K COMPRESSED AIR OUTLET

Used to connect the hose that carries the compressed air to the requested air-powered tool.

L NON RETURN VALVE

The one way valve that allows the air to flow in one direction only, from the compressor pump to the air receiver.

PACKAGING

STANLEY PACKAGING HIGHLIGHTS

Each model is packed in a coloured box (models above 50 litres in a brown box with colour poster) that uses appealing graphics as well as simple and clear images to illustrate the content and its range scale of applications, helping the consumer choose the right product.



Pictograms of the main technical characteristics.

Symbols that help the customer to select the right compressor for the intended use.

The same symbols are printed on the packaging of Stanley accessories and indicate which compressor is suitable for these tools.




Product photos in the foreground.

Applications range.

An example: a WHITE symbol on the box of a compressor means that this machine is compatible with all pneumatic tools that have the same symbol on their packaging.

SYMBOL / USE




When printed on the packaging, this symbol indicates that the compressor is suitable for:



BLOWING INFLATING AIRBRUSH STAPLING NAILING



CLEANING SPRAYING




2 symbols allow for the following applications:



BLOWING INFLATING AIRBRUSH STAPLING NAILING



CLEANING SPRAYING PROF.SPRAYING SCREWING



3 symbols allow for a broad field of applications:



BLOWING INFLATING AIRBRUSH STAPLING NAILING



CLEANING SPRAYING PROF.SPRAYING SCREWING




WASHING CHISELING POLISHING GRINDING

SILTEK RANGE

HIGHLIGHTS

ULTRA-SILENT COMPRESSORS DESIGNED TO BE USED WHEREVER YOU WANT.

Oilless technology, no need in maintenance and respect the environment.
Ideal for all applications requiring noiseless operation.

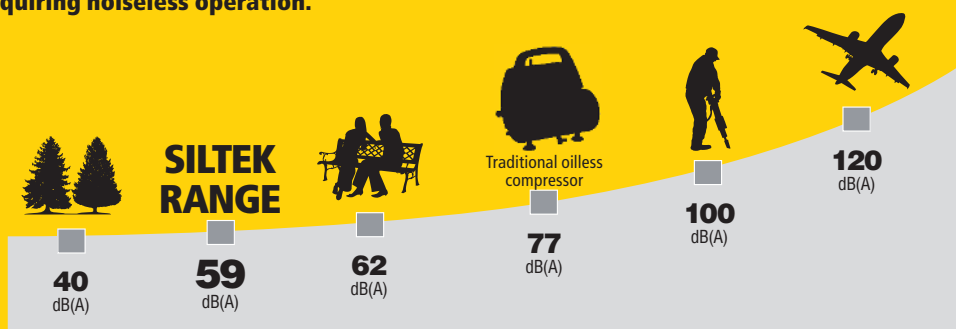

DST 100/8/6



- Ultra-silent compressor for home and professional use.
- Portable and compact, it can be used and stored even in small spaces.
- Heavy-duty plastic shrouds protect the internal mechanical parts.



NEW

Name	Code	Stanley Code	Pump	Tank	Power	Cylinder	Max Press.	Lubricated	RPM	Air displacement	Voltage Frequency	Gross weight	Box dimensions	Ean code
				L	Hp/kW	n°	bar/PSI			l/min./CFM	Volt/Hz	kg/lbs	LxWxH	
DST 100/8/6	B2BE104STN703	SXCM0002E	OL100	6	1/0,75	2	8/116	NO	1450	105/3,7	230/50	17,1/37,7	360x365x375	8016738768763

SILTEK RANGE

SXCMS1324HE



Additional features:

- Ideal for all professional use.
- Lightweight and compact 24-litre tank.
- Dual front feet offer greater stability.
- Sturdy wheels ensure greater stability and handling.
- Large gauges on the compressor for easier reading.



Solid one-piece handle, fixed and skewed for an easier transportation.



SXCMS1350HE



This model has the same advantages of SXCMS1324HE but with a 50-litre tank for a large air reserve.

Tap ball valve with enlarged passage to avoid blocking and obstructions.

Name	Code	Pump	Tank	Power	Cylinder	Max Press.	Lubricated	RPM	Air displacement	Voltage Frequency	Gross weight	Box dimensions	Ean code
			L	Hp/kW	n°	bar/PSI			l/min/CFM	Volt/Hz	kg/lbs	WxDxH	
SXCMS1324HE	B2CC2G4STN704	OL130	24	1,3/1	2	8/116	NO	1450	150/5,3	230/50	24,4/53,8	615x295x625	8016738771480
SXCMS1350HE	B2DC2G4STN705	OL130	50	1,3/1	2	8/116	NO	1450	150/5,3	230/50	31,5/69,5	755x330x665	8016738771497

SILTEK RANGE

SXCMS2050HE



Additional features:

- Ideal for all professional use.
- Ultra-silent compressor with 2 hp power.
- 50-litre tank for a large air reserve.
- Comfortable handle and large wheels for easy transport.
- Large gauges on the compressor for easier reading.
- Dual front feet offer greater stability.



SXCMS1350VE



Additional features:

- Ideal for all professional use.
- Fully protected pump thanks to steel casing.
- Compact vertical 50-litre tank.
- Sturdy handle with rubber grip ensures easy handling.
- Complete and compact control panel with large gauges on the compressor for easier reading.
- Rubber feet for enhanced stability during use.

Name	Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min./CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions WxDxH	Ean code
SXCMS2050HE	B2DC4045TN707	OL130S	50	2/1,5	2	8/116	NO	1400	240/8,5	230/50	37,7/83,1	755x330x665	8016738771510
SXCMS1350VE	B2DV2G45TN706	OL130	50	1,3/1	2	8/116	NO	1450	150/5,3	230/50	28,7/63,3	390x390x870	8016738771503

SILTEK RANGE

SXCMS2652HE



This model has the same advantages described on page 7 but with two ultra-silent pumps, suitable for intensive use.

Additional features:

- 50-litre tank for a large air reserve.
- Sturdy handle with rubber grip ensures easy handling.
- Complete and compact control panel with large gauges on the compressor for easier reading.
- Rubber feet for enhanced stability during use.



SXCMS30103E



This model has the same advantages described on page 7 and above, but with three ultra-silent pumps, suitable for intensive use and a larger air reserve to ensure long operational continuity.

Double caster wheels.

Name	Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min/CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions WxDxH	Ean code
SXCMS2652HE	B2DC4G4STN708	OL130	50	2,6/2	4	8/116	NO	1450	270/9,5	230/50	44/97	800x310x700	8016738771527
SXCMS30103E	B2FC504STN709	OL130	100	3/2,2	6	8/116	NO	1450	315/11,1	230/50	65/143,3	1030x390x820	8016738771534

OILLESS RANGE

AIR KIT



- Perfect for small household chores.
- Extremely lightweight and compact (no tank).
- Features a spacious storage compartment for accessories.




ACCESSORIES INCLUDED:

- Inflating gun,
- 3-piece kit containing needles for inflating sports balls, bicycles and small mattresses,
- Blowing nozzle,
- 3 metre rubber hose.

Name	Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min./CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions WxDxH	Ean code
AIR KIT	8215190STN595_	OL195	-	1,5/1,1	1	8/116	NO	3400	180/6,35	230/50	6,1/13,5	330x255x335	8016738753899

OILLESS RANGE

DN 200/10/5



- Perfect for all home and hobby applications.
- Simple and easy-to-use control panel.
- Easy to transport thanks to the shoulder belt and the comfortable handle.
- Storage compartment for accessories.
- Compact for easy storage.



Integrated hose reel.

Shoulder belt for easy transport.



Compact design.



Accessories not included.

Name	Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min/CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions WxDxH	Ean code
DN 200/10/5	8215250STNS96_	0L195	5	1,5/1,1	1	10/145	NO	3400	180/6,35	230/50	9,7/21,3	430x210x392	8016738754438

OILLESS RANGE

DN 200/8/6



- Helpful for domestic use or crafts.
- Lightweight and extremely portable.
- ON/OFF switch and control panel with easy-read gauge makes it simple to use.
- Tool hook and power cord reel on the back.




Accessories not included.



Easy to carry thanks to the comfortable handle.

Rubber feet for enhanced stability during work.

D 200/10/24



- Oilless type product that can perform at up to 10 bar increasing the air reserve in the tank by 25%.
- Perfect for all home and hobby applications.
- Large wheels make it stable and easy to transport.
- Cover with control panel and two built-in storage compartments for accessories.



Handle with rubber knob.




Accessories not included.

Name	Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min./CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions WxDxH	Ean code
DN 200/8/6	C6BB304STN039_	OL195	6	1,5/1,1	1	8/116	NO	3400	180/6,35	230/50	10/22	356x315x375	8016738703788
D 200/8/24	B6CC304STN003	OL195	24	1,5/1,1	1	8/116	NO	3400	180/6,35	230/50	17/37,5	570x255x444	8016738702620
D 200/10/24	B6CC304STN004	OL195	24	1,5/1,1	1	10/145	NO	3400	180/6,35	230/50	18,4/40,5	570x255x444	8016738702637

OILLESS RANGE


D 200/10/24V



- Oilless compressor that is maintenance-free
- Ideal for all hobby applications.
- Maximum pressure 10 bar.
- Compact and easy to transport thanks to the handle built into the shroud.
- Control panel built into the cover.
- Sleek design thanks to the upright tank.
- Rubber feet for enhanced stability during use.



D 230/10/50V



- Extremely versatile compressor with 2 Hp power and an ample reserve of air.
- Sleek design thanks to the compact, upright tank.
- Large handle and wheels make it easy to transport.




Accessories not included.



Name	Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min/CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions WxDxH	Ean code
D 200/10/24V	81171905TN598_	OL195	24	1,5/1,1	1	10/145	NO	3400	180/6,35	230/50	16/35,2	323x323x648	8016738754940
D 230/10/50V	81171805TN067	OL227	50	2/1,5	1	10/145	NO	3400	222/7,8	230/50	24,9/54,8	340x340x865	8016738750478
D 270/10/100V	82133435TN592	OL295	100	2,5/1,8	1	10/145	NO	2850	270/9,5	230/50	45,4/99,9	467x455x1100	8016738753882

DIRECT DRIVEN LUBRICATED RANGE


D 211/8/24



- Lubricated standard compressor extremely versatile thanks to its 2 Hp power.
- Powerful and practical for all crafts, even those most demanding.
- Simple controls make it easy to use.
- Rubber grip handle and wheels for easy transport.



D 211/8/50



Same characteristics as D 211/8/24 but with a 50-litre tank for a larger air reserve.



Name	Code	Pump	Tank L	Power Hp/kW	Cylinder n°	Max Press. bar/PSI	Lubricated	RPM	Air displacement l/min./CFM	Voltage Frequency Volt/Hz	Gross weight kg/lbs	Box dimensions WxDxH	Ean code
D 211/8/24	FC2C404STN005_	FC2	24	2/1,5	1	8/116	YES	2850	222/7,8	230/50	25,1/55,2	570x255x590	8016738702644
D 211/8/50	FC2D404STN006_	FC2	50	2/1,5	1	8/116	YES	2850	222/7,8	230/50	33,3/73,2	770x310x650	8016738702651

BELT DRIVEN SINGLE-STAGE COMPRESSORS


- Belt driven, single stage, two cylinder compressors with cast-iron cylinder for both the skilled craftsman and hobby worker alike.

- Compact machines suitable for use even in tight spaces.
- Simple, user friendly controls.
- Sturdy wheels and comfortable handle ensure easy transport.
- The 100-litre models feature a front caster wheel to simplify transportation.

B 251E/9/50



B 345E/9/100




Name	Code	Pump	Tank	Power	Cylinder	Max Press.	Lubricated	RPM	Air displacement	Voltage Frequency	Gross weight	Box dimensions	Ean code
			L	Hp/kW	n°	bar/PSI			l/min./CFM	Volt/Hz	kg/lbs	WxDxH	
B 251E/9/50	28DC404STN604	B2800	50	2/1,5	2	9/131	YES	1250	255/9	230/50	46,4/102,3	770x340x670	8016738755398
B 345E/9/50	28DC504STN605	B2800B	50	3/2,2	2	9/131	YES	1480	330/11,6	230/50	50/110	770x340x670	8016738755404
B 251E/9/100	28FC404STN606	B2800	100	2/1,5	2	9/131	YES	1250	255/9	230/50	58,5/128,7	950x390x770	8016738755411
B 345E/9/100	28FC504STN607	B2800B	100	3/2,2	2	9/131	YES	1480	330/11,6	230/50	62/136,4	950x390x770	8016738755428


BELT DRIVEN SINGLE-STAGE COMPRESSORS

- Traditional range of safe, versatile belt-driven compressors designed for additional durability.
- Compatible with a vast range of pneumatic tools.
- Available on tanks from 50 to 270 litres.
- Pump with large finned surfaces for better cooling.
- Simple, user friendly controls.
- Large wheels and sturdy handle ensure easy transport.
- Available with three phase electric motor for heavy duty and extensive use.

B 251/10/50



B 251/10/100



Name	Code	Pump	Tank	Power	Cylinder	Max Press.	Lubricated	RPM	Air displacement	Voltage Frequency	Gross weight	Box dimensions	Ean code
			L	Hp/kW	n°	bar/PSI			l/min./CFM	Volt/Hz	kg/lbs	WxDxH	
B 251/10/50	28DC404STN086	B2800	50	2/1,5	2	10/145	YES	1250	255/9	230/50	55/121	800x390x750	8016738753844
B 251/10/100	28FC404STN087	B2800	100	2/1,5	2	10/145	YES	1250	255/9	230/50	65/143	1025x435x845	8016738753837
B 251/10/100 T	28FC441STN088	B2800	100	2/1,5	2	10/145	YES	1250	255/9	400/50	66,5/146,3	1025x435x845	8016738753820
B 345/10/100	28FC504STN089	B2800B	100	3/2,2	2	10/145	YES	1570	330/11,6	230/50	69/151,8	1025x435x845	8016738753813
B 345/10/100 T	28FC541STN090	B2800B	100	3/2,2	2	10/145	YES	1570	330/11,6	400/50	69/151,8	1025x435x845	8016738753806
B 345/10/200	28LC504STN158	B2800B	200	3/2,2	2	10/145	YES	1570	330/11,6	230/50	104/228,8	1435x475x1125	8016738762211
B 345/10/200 T	28LC541STN159	B2800B	200	3/2,2	2	10/145	YES	1570	330/11,6	400/50	102/224,4	1435x475x1125	8016738762228
B 395/10/200	36LC504STN160	B3800B	200	3/2,2	2	10/145	YES	1100	390/13,8	230/50	110/242	1435x475x1125	8016738762235
B 395/10/200 T	36LC541STN161	B3800B	200	3/2,2	2	10/145	YES	1100	390/13,8	400/50	112/246,4	1435x475x1125	8016738762242
B 475/10/200 T	36LC601STN162	B3800B	200	4/3,0	2	10/145	YES	1400	480/16,9	400/50	116/255,2	1435x475x1125	8016738762259
B 475/10/270 T	36NC601STN163	B3800B	270	4/3,0	2	10/145	YES	1400	480/16,9	400/50	132,5/291,5	1640x560x1180	8016738762266

WALL TECH

COMPRESSORE CON ARROTOLATORE COMPRESSOR WITH HOSE REEL

SXCMD15WE

Realizzato per soddisfare le esigenze di aria compressa di hobbisti e professionisti.

- ✓ **Risparmi spazio:** grazie all'installazione a muro semplice e intuitiva.
- ✓ **Gruppo pompante oilfree:** non richiede manutenzione e rispetta l'ambiente.
- ✓ **Immediato da utilizzare:** pulsante di accensione ON/OFF.
- ✓ **Arrotolatore integrato di 9 m:** mantiene il vostro spazio di lavoro ordinato e pulito senza la necessità di spostare il compressore nella zona di lavoro.
- ✓ **Sicuro:** design compatto e robusto. Protetto in ogni sua parte.
- ✓ **Versatile:** Utilizzabile con una vasta gamma di accessori e di utensili pneumatici.




Designed to satisfy the compressed air needs of hobby workers and professionals.

- ✓ **Space saver:** thanks to the simple and intuitive wall installation.
- ✓ **Oilless technology:** maintenance free. Environmental-friendly.
- ✓ **Ready to use:** ON/OFF switch.
- ✓ **Built-in hose reel 9m:** maintains your workspace neat and clean without the need to move the compressor in the work area.
- ✓ **Safe:** compact and sturdy design. The plastic shrouds protect the internal mechanical parts.
- ✓ **Versatile:** Useable with a wide range of accessories and pneumatic tools.

L'arrotolatore può ruotare fino a 180° per arrivare ovunque. 180° hose reel rotation to reach whichever point you wish.

Tubo 9 m con attacco rapido. Hose 9m with quick coupling.

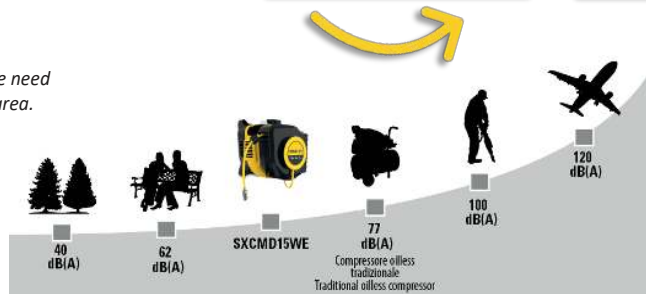

Code	Pump	Power	Max Press.	Lubricated	RPM	Air displacement	Volt/Hz
8215400STN724 (ISTA6) 8215400STN725	OL197	1,5 Hp/1,1 kW	8 bar/116 PSI	NO	2000	160 l/min – 5,6 CFM	230/50

**NEW
DESIGN**

WALL TECH

COMPRESSORE CON ARROTOLATORE COMPRESSOR WITH HOSE REEL

SXCMD15WE

Realizzato per soddisfare le esigenze di aria compressa di hobbisti e professionisti.

- ✓ **Risparmi spazio:** grazie all'installazione a muro semplice e intuitiva.
- ✓ **Gruppo pompante oilfree:** non richiede manutenzione e rispetta l'ambiente.
- ✓ **Immediato da utilizzare:** pulsante di accensione ON/OFF.
- ✓ **Arrotolatore integrato di 9 m:** mantiene il vostro spazio di lavoro ordinato e pulito senza la necessità di spostare il compressore nella zona di lavoro.
- ✓ **Sicuro:** design compatto e robusto. Protetto in ogni sua parte.
- ✓ **Versatile:** Utilizzabile con una vasta gamma di accessori e di utensili pneumatici.




Designed to satisfy the compressed air needs of hobby workers and professionals.

- ✓ **Space saver:** thanks to the simple and intuitive wall installation.
- ✓ **Oilless technology:** maintenance free. Environmental-friendly.
- ✓ **Ready to use:** ON/OFF switch.
- ✓ **Built-in hose reel 9m:** maintains your workspace neat and clean without the need to move the compressor in the work area.
- ✓ **Safe:** compact and sturdy design. The plastic shrouds protect the internal mechanical parts.
- ✓ **Versatile:** Useable with a wide range of accessories and pneumatic tools.

L'arrotolatore può ruotare fino a 180° per arrivare ovunque. 180° hose reel rotation to reach whichever point you wish.

Tubo 9 m con attacco rapido. Hose 9m with quick coupling.

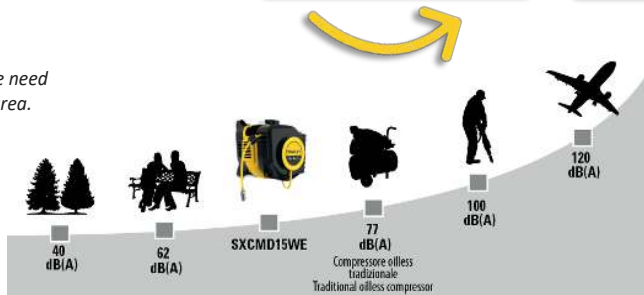

Code	Pump	Power	Max Press.	Lubricated	RPM	Air displacement	Volt/Hz
8215400STN724 (ISTA6) 8215400STN725	OL197	1,5 Hp/1,1 kW	8 bar/116 PSI	NO	2000	160 l/min – 5,6 CFM	230/50

**NEW
DESIGN**

PNEUMATIC TOOLS



www.stanleytools.eu

www.stanleytools.eu

STANLEY TOOLS HIGHLIGHTS

The product is completely sealed inside the blister pack.

Clear technical data indicated with symbols.



Symbols that identify the most suitable tool for the compressor of interest.

An example: WHITE symbol on the packaging of the pneumatic tool means that it is compatible with all compressors that have the same symbol on their packaging.

Laser Stanley logo on all tools.

The same symbols are printed on the compressor packaging and indicate the range of tools, which they are compatible with.

SYMBOL / USE

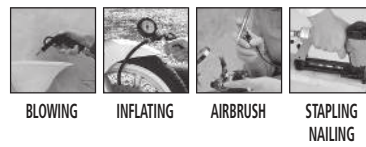

TOOLS

AIR DUSTING GUNS



Air dusting gun

Code	Ean code	Air displac. l/min./ CFM	Max working press. bar/ PSI	Packaging	Selling unit
150036XSTN	8016738719871	150/5,3	8/116	Blister	8
170036XSTN	8016738762860	150/5,3	8/116	Multibox	12



Air dusting gun long nose

Code	Ean code	Air displac. l/min./ CFM	Max working press. bar/ PSI	Packaging	Selling unit
150026XSTN	8016738719055	150/5,3	8/116	Blister	8
170026XSTN	8016738762884	150/5,3	8/116	Multibox	12



Air dusting gun with variable air flow

Code	Ean code	Air displac. l/min./ CFM	Max working press. bar/ PSI	Packaging	Selling unit
150022XSTN	8016738719147	150/5,3	8/116	Blister	6

INFLATING GUNS



Inflating gun

Code	Ean code	Air displac. l/min./ CFM	Max working press. bar/ PSI	Packaging	Selling unit
150533XSTN	8016738719031	100/3,5	10/145	Blister	4
170533XSTN	8016738762877	100/3,5	10/145	Multibox	12



Homologated inflating gun + kit 3 needles for inflating

Code	Ean code	Air displac. l/min./ CFM	Max working press. bar/ PSI	Packaging	Selling unit
150534XSTN	8016738719383	100/3,5	10/145	Blister	4

WASHING GUNS



Spray nozzle 1 litre

Code	Ean code	Air displac. l/min./ CFM	Max working press. bar/ PSI	Packaging	Selling unit
150043XSTN	8016738719093	130/4,6	8/116	Blister	2



Air/water washing gun

Code	Ean code	Air displac. l/min./ CFM	Max working press. bar/ PSI	Packaging	Selling unit
150049XSTN	8016738719123	180/6,4	8/116	Blister	2

SANDBLASTING GUNS



Sandblasting gun

Code	Ean code	Air displac. l/min./ CFM	Max working press. bar/ PSI	Packaging	Selling unit
150063XSTN	8016738719109	300/10,5	8/116	Blister	2



Professional sandblasting gun

Code	Ean code	Air displac. l/min./ CFM	Max working press. bar/ PSI	Packaging	Selling unit
150063XSTN	8016738719079	300/10,5	8/116	Blister	2

AIR CAULKING AND GREASE GUNS



Air caulking gun

Code	Ean code	Air displac. l/min./ CFM	Max working press. bar/ PSI	Packaging	Selling unit
120573XSTN	8016738719789	100/3,5	4/58	Box	1



Pneumatic grease gun

Code	Ean code	Air displac. l/min./ CFM	Max working press. bar/ PSI	Packaging	Selling unit
120569XSTN	8016738719840	100/3,5	6/87	Box	1

SPRAY GUNS

Air brush kit



Code	Ean code	Air displac. l/min./ CFM	Max working pressure bar/ PSI	Tank CC	Nozzle ø mm	Packaging	Selling unit
150119XSTN	8016738714456	15/0,5	3/43,5	1x22/1x50	0,4	Blister	2

Precision spray gun



Code	Ean code	Air displac. l/min./ CFM	Max working pressure bar/ PSI	Tank L	Nozzle ø mm	Packaging	Selling unit
150129XSTN	8016738714463	70/2,5	4/58	0,25	0,5	Blister	2

Primer gravity spray gun



Code	Ean code	Air displac. l/min./ CFM	Max working pressure bar/ PSI	Tank L	Nozzle ø mm	Packaging	Selling unit
160132XSTN	8016738719772	120/4,2	4/58	0,50	2,5	Blister	2

Gravity spray gun



Code	Ean code	Air displac. l/min./ CFM	Max working pressure bar/ PSI	Tank L	Nozzle ø mm	Packaging	Selling unit
150133XSTN	8016738719062	120/4,2	4/58	0,50	1,5	Blister	2
170133XSTN	8016738762891	120/4,2	4/58	0,50	1,5	Multibox	6

Yellows

<http://www.yellows.cl> | cristian@yellows.cl